N Male Connector for 1/2" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

OMNI FIT^{\mathbb{M}} high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminum) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment.

FEATURES / BENEFITS

- Cost effective two-piece design for safe and easy installation
- Compatible with copper and aluminium cable types i.e. one connector for both outer conductor materials eliminates the risk of faulty connector installation and helps to keep inventory down
- Robust mechanical design for low and consistent intermodulation performance i.e. keeps the mobile network performance up reduces the number of dropped calls and avoids revenue losses
- Superior electrical performance for consistent and repeatable VSWR i.e. ensure network system performance
- Waterproof to IP 68 i.e. no downtime risk, secures revenue
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis



NM-LCF12-C03

Technical features

| GENERAL SPECIFICATIONS | | | | |
|---------------------------|--------------------|---------|-----------|-----------------|
| Transmission Line Type | Coaxial Cable | | | |
| Cable Size | 1/2 | | | |
| Cable Type | Foam Dielectric | | Radiating | |
| Model Series | LCF12-50 Series | ICA12-5 | 0 Series | RCF12-50 Series |
| Connector Interface | N | | | |
| Connector Type | OMNI FIT™ Standard | | | |
| Sealing Method | O-ring | | | |
| Gender | Male | | | |
| ELECTRICAL SPECIFICATIONS | | | | |

| Nominal Impedance, ohms | Ohm | 50 |
|--------------------------------------|-----------|--|
| 3rd Order IM Product @ 2x20 Watts | dBc | -157 ; typical -160 |
| Maximum Frequency | GHz | 6.0 |
| VSWR, Return Loss | VSWR (dB) | 0 < f ≤ 1.0 GHz: 1.03 (36.6) 1.0 < f ≤ 2.7 GHz: 1.04 (34.1) 2.7 < f ≤ 3.7 GHz: 1.08 (28.3) 3.7 < f ≤ 5.0 GHz: 1.15 (23.1) 5.0 < f ≤ 6.0 GHz: 1.25 (19.1) |

MECHANICAL SPECIFICATIONS

| Plating Outer/Inner | | Trimetal/Silver |
|--------------------------|---------|-----------------|
| Length | mm (in) | 56.5 (2.23) |
| Outer Diameter | mm (in) | 22 (0.87) |
| Inner Contact Attachment | | Spring Finger |
| Outer Contact Attachment | | Spring C-Ring |


ACCESSORIES

| Wrench size front | mm (in) | 20 (13/16) |
|-------------------|---------|------------------|
| Wrench size rear | mm (in) | 20 (13/16) |
| Trimming Tool | | TRIM-SET-L12-C02 |

NM-LCF12-C03 REV: B REV DATE: 07 Oct 2018 www.rfsworld.com



N Male Connector for 1/2" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

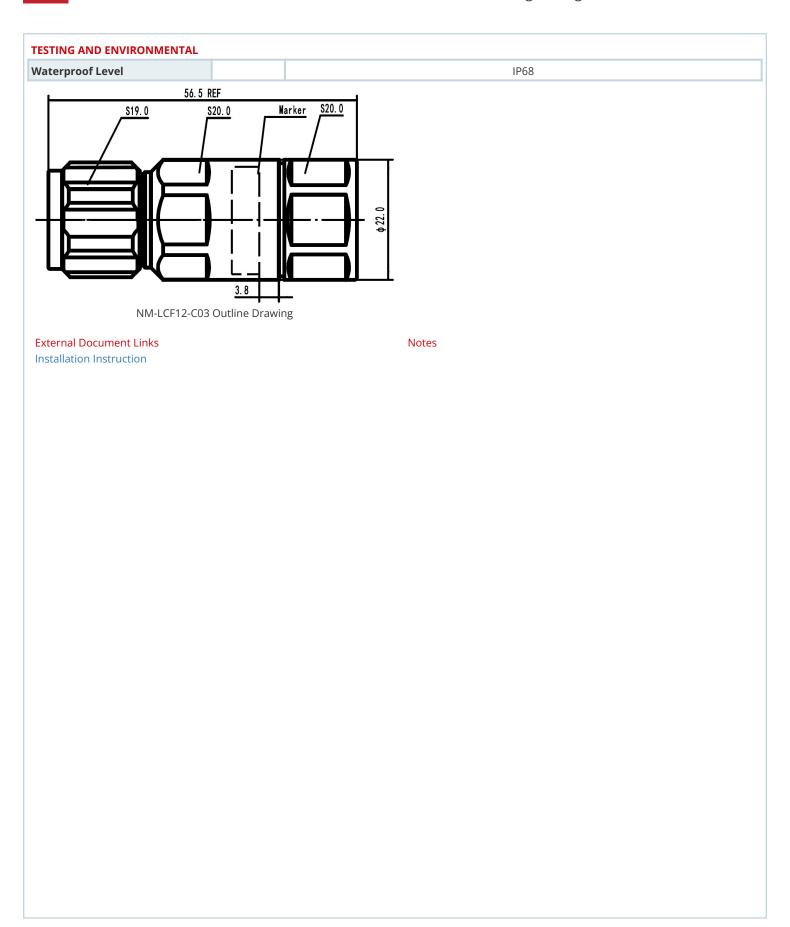

NM-LCF12-C03 REV : B REV DATE : 07 Oct 2018 WWW.rfsworld.com